


## Allgemeine Beschreibung:

Das Back Electret Kondensatormikrofon der gehobenen Klasse ist sehr filigran und von besonders leichter Bauweise. Das Earset zeichnet sich durch einen sehr angenehmen Tragekomfort aus und ist auch auch für Brillenträger geeignet.

Die hochwertige Mikrofonkapsel hat ausgesprochen gute Klang- und Übertragungseigenschaften bei der Gesangs- und Sprachwiedergabe und ist in allen Bereichen einsetzbar, sogar für Sport- und Tanzlehrer. In Verbindung mit einem Taschensender bietet das Earset dem Benutzer große Bewegungsfreiheit.


## Eigenschaften:

- Rechts und links tragbarer Ohrbügel mit biegsamem und verstellbarem Mikrofonarm und Kabelkupplung
- Hochwertige Mikrofonkapsel mit Nierencharakteristik
- Mikrofonkabel mit Anschlussstecker nach Wahl, für Taschensender verschiedener Hersteller
- Windschutz im Lieferumfang enthalten

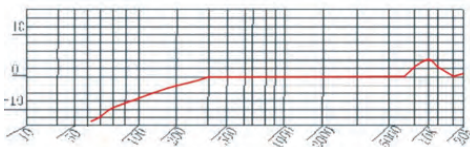

## Technische Daten:

Typ:	Back Electret Kondensator
Richtcharakteristik:	Niere
Frequenzbereich:	50 Hz - 16 kHz
Empfindlichkeit:	-46 dB $\pm$ 3 dB
Impedanz:	1 k $\Omega$ $\pm$ 30 %
SPL:	max. 135 dB
Stromversorgung:	1,5 - 12 V DC
Gewicht:	~ 23 g mit Kabel und Stecker
Kabellänge:	~ 1,5 m
Farben:	hautfarbig schwarz
Lieferbare Anschlüsse:	3,5 mm Klinke für Sennheiser, verschraubt 3-pol Mini-XLR für AKG, verriegelt 4-pol Mini-XLR für Shure, verriegelt




## Gebrauchsanweisung:

Setzen sie das Mikrofon auf und bringen sie die Mikrofonkapsel in eine gute Sprechposition nahe am Mund, dafür kann der Mikrofonarm gebogen oder bewegt werden.

Verbinden sie das Mikrofon mit dem Taschensender.

Schützen sie das Mikrofon vor Wasser, Schmutz oder Hitze (über 40° C)!

Zum Reinigen benutzen Sie ein trockenes, weiches Tuch ohne chemische Zusätze!

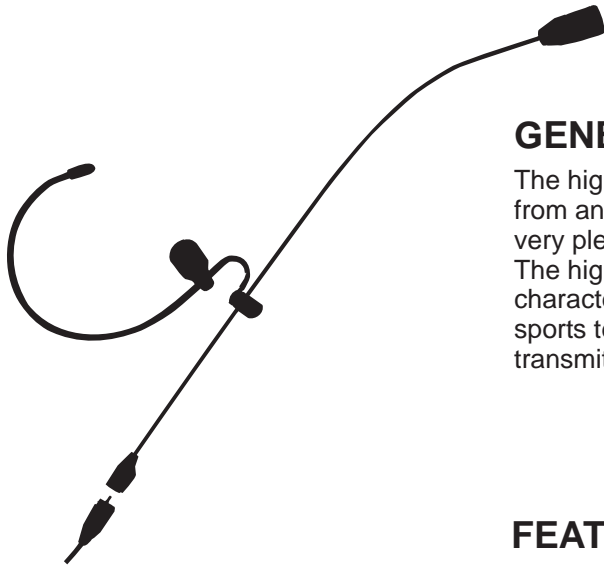


## GENERAL APPLICATIONS:

The high-quality back electret condenser microphone is very filigree and from an especially light construction. The earset distinguishes itself by a very pleasant wearing comfort and is also suitable for wearers of glasses. The high-quality microphone capsule has very good sound and transmitter characteristics for vocal and speech and is applicable in all areas even for sports teachers and dancing instructors. By operating with a pocket transmitter the earset allows unlimited mobility to the user.


## FEATURES:

- Ear hook for wearing right or left. Adjustable and bendable microphone arm with cable socket
- High-Quality microphone capsule with unidirectional polar pattern
- Microphone cable with connector to choice for different pocket transmitter brands
- Delivery with windscreen

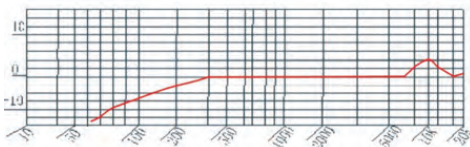

## TECHNICAL SPECIFICATIONS:

Type:	back electret condenser
Polar pattern:	cardioid / unidirectional
Frequency response:	50 Hz - 16 kHz
Sensitivity:	-46 dB $\pm$ 3 dB
Impedance:	1 k $\Omega$ $\pm$ 30 %
SPL:	max. 135 dB
Operating voltage:	1.5 - 12 V DC
Weight:	~ 23 g with cable and plug
Cable:	~ 1.5 m
Colours:	tan black
Deliverable connector:	3.5 mm jack for Sennheiser, screwed 3-pin mini-XLR for AKG, interlocked 4-pin mini-XLR for Shure, interlocked



## HOW TO USE:

Put on the microphone and place the microphone capsule close to the mouth into a good talk position.

For this, the flexible microphone arm can be bended and moved.

Connect the microphone to the pocket transmitter.

Protect the microphone against water, humidity and heat (over 40° C)!

For cleaning only use a dry soft cloth without any chemicals.